

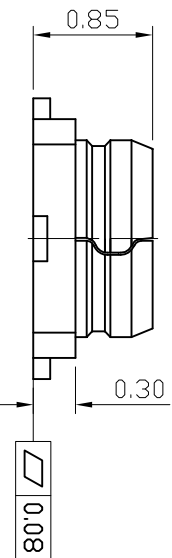
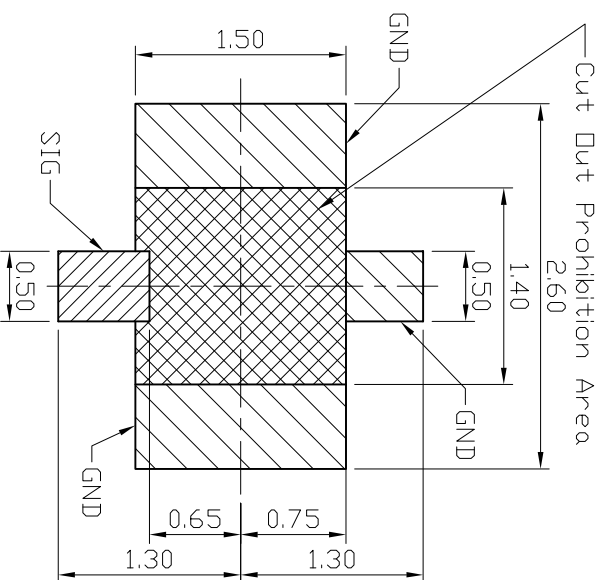
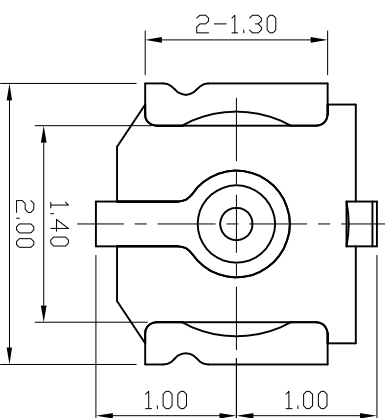
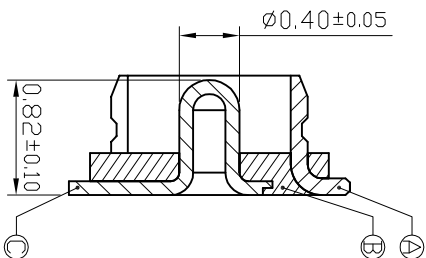


Rev.	ECN Number	Description	Date	Drawn	Checked	Approved

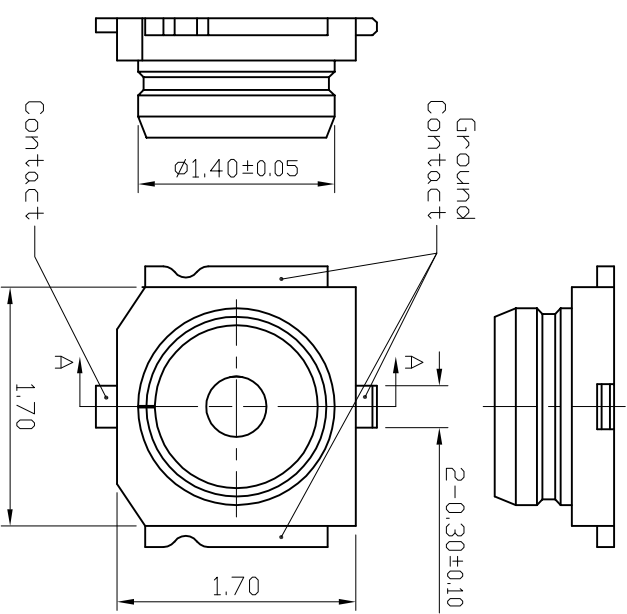

Section A-A
Scale 1:1

RECOMMENDED P.C.B. LAYOUT
TOP VIEW(TOLERANCE:±0.05)

NOTES:

- 1.1 Rated Voltage 60V AC
- 1.2 Frequency Range 0~6GHz
- 1.3 Impedance 50Ω
- 1.4 Operating Temperature -40°C~+90°C
- 2.1 Voltage Standing Wave Ratio(VSWR)
 - 1.3 max. at 0~3GHz
 - 1.4 max. at 3~6GHz
- 2.2 Durability 30 cycles
- 3.1 Packing tape & reel 1500Pcs/Reel (Φ178mm)

C	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER NI
B	HOUSING	1	Hight Temp. Plastic UL94V-0/BLACK
A	SHELL	1	COPPER ALLOY/Au PLATED OVER NI
ITEM	PART NAME	Q'TY	MATERIAL/FINISH

PROD. NO. BDM LIST

Mxcon

深圳市镁旺电子科技有限公司
Shenzhen Meiwang Electronic Technology Co., Ltd.

GENERAL TOLERANCE	SCALE: 1:1	DRAWN	DATE
XX. ±0.50		CHECK	DATE
X. ±0.35	UNIT: mm	APPROVE	DATE
.X ±0.25	SIZE: A4		
.XX ±0.15			

DWG. NO.	TITLE	REV.
MHF-RT-3	CUSTOMER DRAWING	A
PARTS NO.(INTENDED USE)	Ultra Small Surface Mount	
MHF-RT-3	Coaxial CONN.	
	USS RF SERIES	1/1