
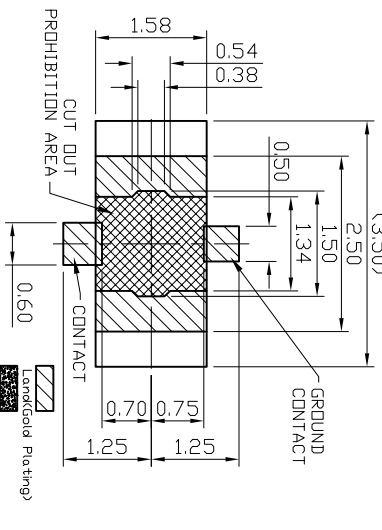
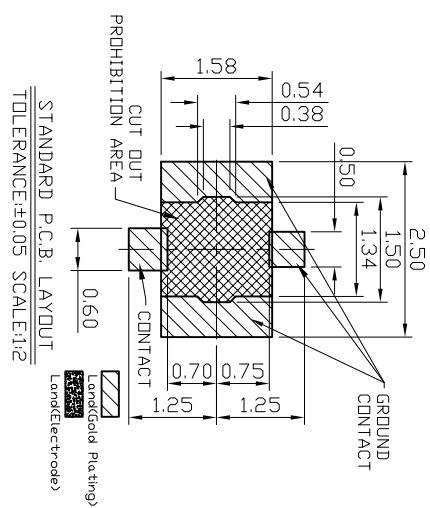
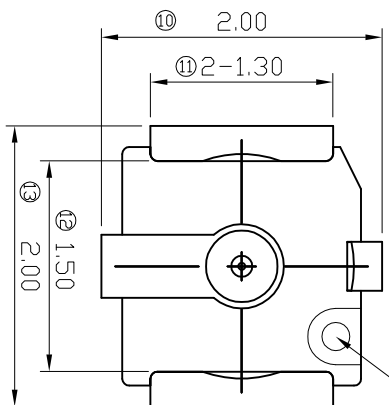
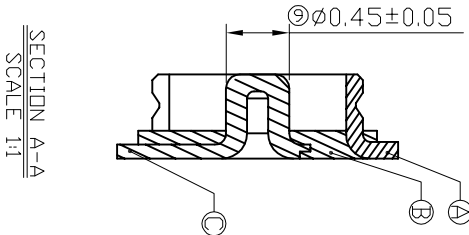
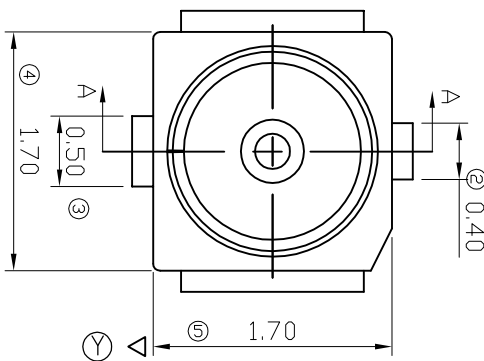
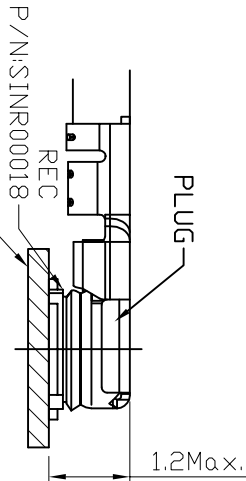


Rev.	ECN Number	Description	Date	Drawn	Checked	Approved



C	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER NI
B	HOUSING	1	Hight Temp. Plastic UL94V-0/BLACK
A	SHELL	1	COPPER ALLOY/Au PLATED OVER NI
ITEM	PART NAME	Q'TY	MATERIAL/FINISH

PROD. NO.

BDM LIST

Notes:

- 1.1 Rated Voltage 60V AC
- 1.2 Frequency Range 0~6GHz
- 1.3 Impedance 50W
- 1.4 Operating Temperature -40°C~+90°C
- 2.1 Voltage Standing Wave Ratio(VSWR) 1.4 max. at 3~6GHz
- 2.2 Durability 1.4 max. at 3~6GHz 30 cycles

Mxcon

深圳市镁旺电子科技有限公司

Shenzhen Mewang Electronic Technology Co., Ltd.

GENERAL TOLERANCE	SCALE: 1:1	DRAWN	DATE
XX. ±0.50			
X. ±0.35	X.° ±2.0°	CHECK	DATE
.X ±0.25	.X° ±1.0°	APPROVE	DATE
.XX ±0.15	.XX° ±0.5°		
UNIT: mm	SIZE: A4		

DWG. NO.

MHF-RT-4

TITLE

CUSTOMER DRAWING

REV. A

PARTS NO.(INTENDED USE)

MHF-RT-4

USS RF REC CONN,4代,H0.6 SHEET

USS RF SERIES

1/1