
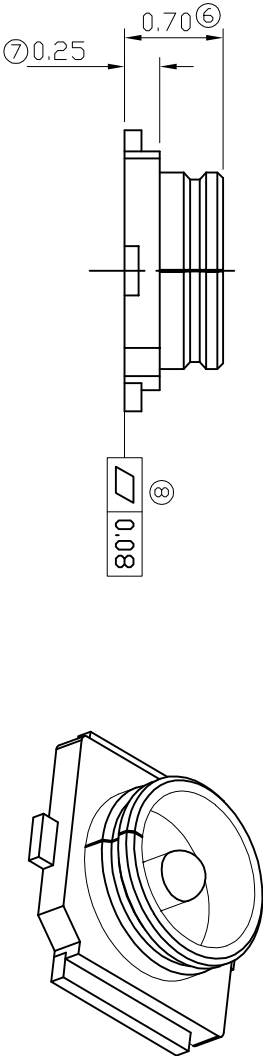


Rev.	ECN Number	Description	Date	Drawn	Checked	Approved

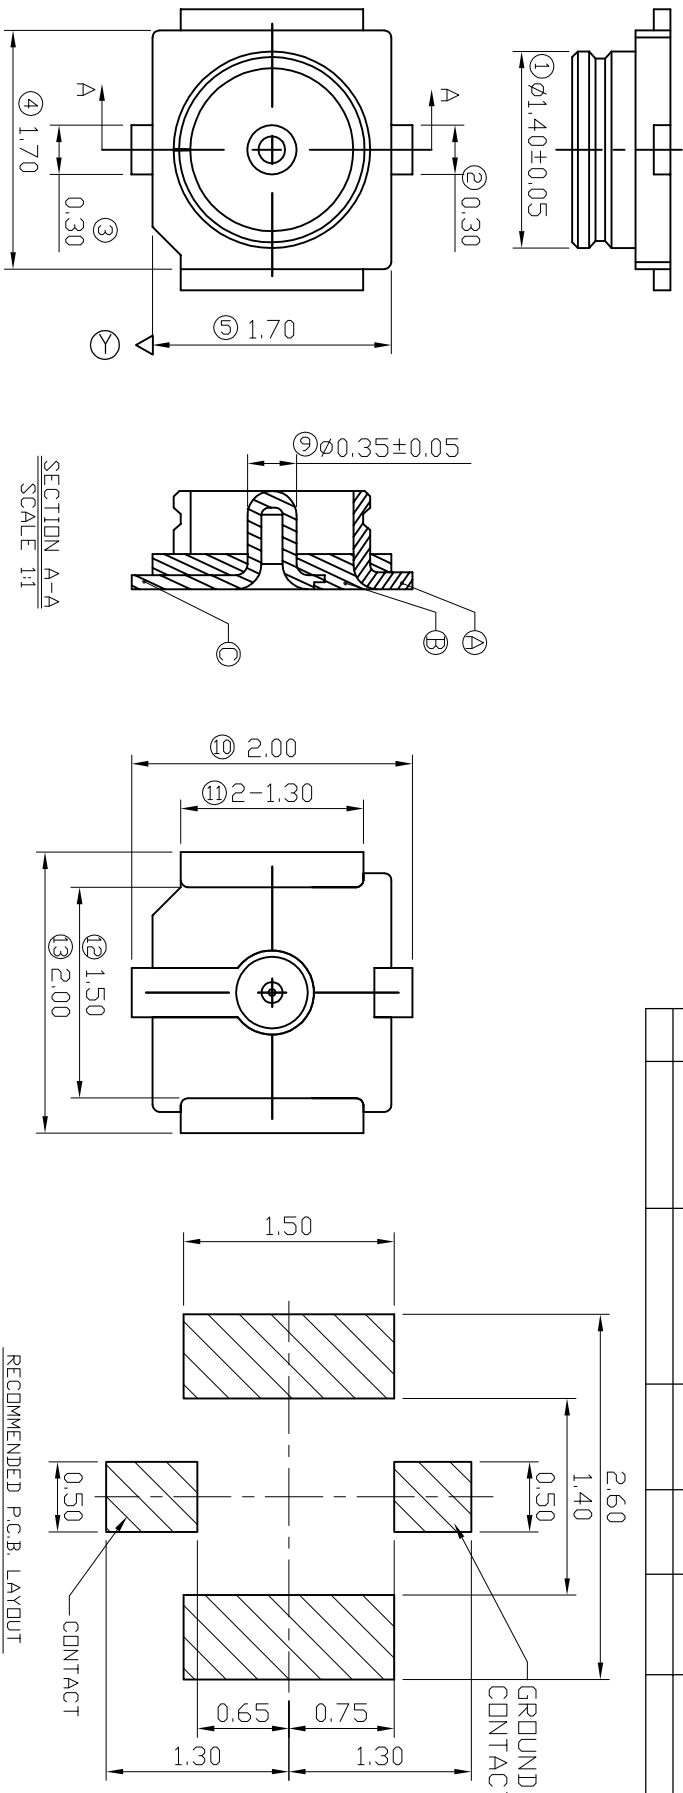

- Notes:
- 1.1 Rated Voltage 60V AC
 - 1.2 Frequency Range 0~6GHz
 - 1.3 Impedance 50Ω
 - 1.4 Operating Temperature -40℃~+85℃
 - 2.1 Voltage Standing Wave Ratio(VSWR) 1.3 max. at 0~3GHz
 - 2.2 Durability 1.4 max. at 3~6GHz 30 cycles
 - 3.1 Packing tape & reel 3000Pcs/Reel (ø178mm)

③	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER Ni
④	HOUSING	1	HIGHT TEMP. PLASTIC UL94V-0/BLACK
⑤	SHELL	1	COPPER ALLOY/Ag PLATED OVER Ni
ITEM	PART NAME	QTY	MATERIAL/FINISH

PRD. NO.	BOM LIST
----------	----------

Mxcon

深圳市镁旺电子科技有限公司
Shenzhen Meiliang Electronic Technology Co., Ltd.

GENERAL TOLERANCE	SCALE: 1:1	DRAWN	DATE
XX. ±0.50			
X. ±0.35	UNIT: mm	CHECK	DATE
.X ±0.25		APPROVE	DATE
.XX ±0.15	SIZE: A4		

DWG. NO.	TITLE	REV.
MHF-RT-4B	CUSTOMER DRAWING	A
PARTS NO.(INTENDED USE)	USS RF REC CONN.4代,H0.7	SHEET
MHF-RT-4B	USS RF SERIES	1/1